

On the $N = 2$ supersymmetric Camassa–Holm and Hunter–Saxton equations

Cite as: J. Math. Phys. 50, 012704 (2009); <https://doi.org/10.1063/1.3060125>

Submitted: 15 September 2008 . Accepted: 26 November 2008 . Published Online: 26 January 2009

J. Lenells, and O. Lechtenfeld



View Online



Export Citation

ARTICLES YOU MAY BE INTERESTED IN

[Finite propagation speed for the Camassa–Holm equation](#)

Journal of Mathematical Physics **46**, 023506 (2005); <https://doi.org/10.1063/1.1845603>

[A new integrable two-component system with cubic nonlinearity](#)

Journal of Mathematical Physics **52**, 013503 (2011); <https://doi.org/10.1063/1.3530865>

[Global dissipative solutions of a modified two-component Camassa–Holm shallow water system](#)

Journal of Mathematical Physics **52**, 033507 (2011); <https://doi.org/10.1063/1.3562928>

Where in the **world** is AIP Publishing?
Find out where we are exhibiting next



On the $N=2$ supersymmetric Camassa–Holm and Hunter–Saxton equations

J. Lenells^{1,a)} and O. Lechtenfeld^{2,b)}

¹*Department of Applied Mathematics and Theoretical Physics, University of Cambridge, Cambridge CB3 0WA, United Kingdom*

²*Institut für Theoretische Physik, Leibniz Universität Hannover, Appelstraße 2, 30167 Hannover, Germany*

(Received 15 September 2008; accepted 26 November 2008; published online 26 January 2009)

We consider $N=2$ supersymmetric extensions of the Camassa–Holm and Hunter–Saxton equations. We show that they admit geometric interpretations as Euler equations on the superconformal algebra of contact vector fields on the 1|2-dimensional supercircle. We use the bi-Hamiltonian formulation to derive Lax pairs. Moreover, we present some simple examples of explicit solutions. As a by-product of our analysis, we obtain a description of the bounded traveling-wave solutions for the two-component Hunter–Saxton equation. © 2009 American Institute of Physics. [DOI: 10.1063/1.3060125]

I. INTRODUCTION

The Camassa–Holm (CH) equation

$$u_t - u_{txx} + 3uu_x = 2u_x u_{xx} + uu_{xxx}, \quad x \in \mathbb{R}, \quad t > 0 \quad (\text{CH}),$$

and the Hunter–Saxton (HS) equation

$$u_{txx} = -2u_x u_{xx} - uu_{xxx}, \quad x \in \mathbb{R}, \quad t > 0 \quad (\text{HS}),$$

where $u(x,t)$ is a real-valued function, are integrable models for the propagation of nonlinear waves in 1+1-dimension. Equation CH models the propagation of shallow water waves over a flat bottom, $u(x,t)$ representing the water's free surface in nondimensional variables. It was first obtained mathematically²⁰ as an abstract equation with two distinct but compatible Hamiltonian formulations and was subsequently derived from physical principles.^{3,10,19,27} Among its most notable properties is the existence of peaked solitons.³ Equation HS describes the evolution of nonlinear orientation waves in liquid crystals, $u(x,t)$ being related to the deviation of the average orientation of the molecules from an equilibrium position.²⁴

Both CH and HS are completely integrable systems with an infinite number of conservation laws (see, e.g., Refs. 6, 9, 11, 21, 25, and 28). Moreover, both equations admit geometric interpretations as Euler equations for geodesic flow on the diffeomorphism group $\text{Diff}(S^1)$ of orientation-preserving diffeomorphisms of the unit circle S^1 . More precisely, the geodesic motion on $\text{Diff}(S^1)$ endowed with the right-invariant metric given at the identity by

^{a)}Electronic mail: j.lenells@damtp.cam.ac.uk.

^{b)}Electronic mail: lechtenf@itp.uni-hannover.de.

$$\langle u, v \rangle_{H_1} = \int_{S^1} (uv + u_x v_x) dx \quad (1.1)$$

is described by CH³⁴ (see also Refs. 7 and 8), whereas HS describes the geodesic flow on the quotient space $\text{Diff}(S^1)/S^1$ equipped with the right-invariant metric given at the identity by²⁸

$$\langle u, v \rangle_{\dot{H}_1} = \int_{S^1} u_x v_x dx. \quad (1.2)$$

We will consider an $N=2$ supersymmetric generalization of equations CH and HS, which was first introduced in Ref. 35 by means of bi-Hamiltonian considerations. In this paper, we (a) show that this supersymmetric generalization admits a geometric interpretation as an Euler equation on the superconformal algebra of contact vector fields on the 1|2-dimensional supercircle,¹ (b) consider the bi-Hamiltonian structure, (c) use the bi-Hamiltonian formulation to derive a Lax pair, and (d) present some simple examples of explicit solutions.

A. The supersymmetric equation

In order to simultaneously consider supersymmetric generalizations of both the CH and the HS equation, it is convenient to introduce the following notation:

- $\gamma \in \{0, 1\}$ is a parameter which satisfies $\gamma=1$ in the case of CH and $\gamma=0$ in the case of HS.
- $\Lambda = \gamma - \partial_x^2$.
- $m = \Lambda u$.
- θ_1 and θ_2 are anticommuting variables.
- $D_j = \partial_{\theta_j} + \theta_j \partial_x$ for $j=1, 2$.
- $U = u + \theta_1 \varphi_1 + \theta_2 \varphi_2 + \theta_2 \theta_1 v$ is a superfield.
- $u(x, t)$ and $v(x, t)$ are bosonic fields.
- $\varphi_1(x, t)$ and $\varphi_2(x, t)$ are fermionic fields.
- $A = iD_1 D_2 - \gamma$.
- $M = AU$.

Equations CH and HS can then be combined into the single equation

$$m_t = -2u_x m - um_x, \quad x \in \mathbb{R}, \quad t > 0. \quad (1.3)$$

Although there exist several $N=2$ supersymmetric extensions of (1.3), some generalizations have the particular property that their bosonic sectors are equivalent to the most popular two-component generalizations of CH and HS given by (see, e.g., Refs. 4, 16, and 26)

$$m_t + 2u_x m + um_x + \sigma \rho_x = 0, \quad \sigma = \pm 1, \quad (1.4)$$

$$\rho_t + (u\rho)_x = 0.$$

The $N=2$ supersymmetric generalization of Eq. (1.3) that we will consider in this paper shares this property and is given by

$$M_t = -(MU)_x + \frac{1}{2}[(D_1 M)(D_1 U) + (D_2 M)(D_2 U)]. \quad (1.5)$$

Defining ρ by

¹The interpretation of the $N=2$ supersymmetric CH equation as an Euler equation related to the superconformal algebra was already described in Ref. 1.

$$\rho = \begin{cases} v + i\gamma u & \text{if } \sigma = 1, \\ iv - \gamma u & \text{if } \sigma = -1, \end{cases} \tag{1.6}$$

the bosonic sector of (1.5) is exactly the two-component Eq. (1.4).

If u and ρ are allowed to be complex-valued functions, the two versions of (1.4) corresponding to $\sigma=1$ and $\sigma=-1$ are equivalent because the substitution $\rho \rightarrow i\rho$ converts one into the other. However, in the usual context of real-valued fields, the equations are distinct. The discussion in Ref. 35 focused attention on the two-component generalization with $\sigma=-1$. The observation that the $N=2$ supersymmetric CH equation arises as an Euler equation was already made in Ref. 1.

II. GEODESIC FLOW

As noted above, CH and HS allow geometric interpretations as equations for geodesic flow related to the group of diffeomorphisms of the circle S^1 endowed with a right-invariant metric.² More precisely, using the right invariance of the metric, the full geodesic equations can be reduced by symmetry to a so-called Euler equation in the Lie algebra of vector fields on the circle together with a reconstruction equation³³ (see also Refs. 29 and 30). This is how CH and HS arise as Euler equations related to the algebra $\text{Vect}(S^1)$.

In this section, we describe how Eq. (1.5) similarly arises as an Euler equation related to the superconformal algebra $K(S^{1|2})$ of contact vector fields on the 1|2-dimensional supercircle $S^{1|2}$. Since $K(S^{1|2})$ is related to the group of superdiffeomorphisms of $S^{1|2}$, this leads (at least formally) to a geometric interpretation of Eq. (1.5) as an equation for geodesic flow.

A. The superconformal algebra $K(S^{1|2})$

The Lie superalgebra $K(S^{1|2})$ is defined as follows, see Refs. 15 and 23. The supercircle $S^{1|2}$ admits local coordinates x, θ_1, θ_2 , where x is a local coordinate on S^1 and θ_1, θ_2 are odd coordinates. Let $\text{Vect}(S^{1|2})$ denote the set of vector fields on $S^{1|2}$. An element $X \in \text{Vect}(S^{1|2})$ can be written as

$$X = f(x, \theta_1, \theta_2) \frac{\partial}{\partial x} + f^1(x, \theta_1, \theta_2) \frac{\partial}{\partial \theta_1} + f^2(x, \theta_1, \theta_2) \frac{\partial}{\partial \theta_2},$$

where f, f^1, f^2 are functions on $S^{1|2}$. Let

$$\alpha = dx + \theta_1 d\theta_1 + \theta_2 d\theta_2$$

be the contact form on $S^{1|2}$. The superconformal algebra $K(S^{1|2})$ consists of all contact vector fields on $S^{1|2}$, i.e.,

$$K(S^{1|2}) = \{X \in \text{Vect}(S^{1|2}) \mid L_X \alpha = f_X \alpha \text{ for some function } f_X \text{ on } S^{1|2}\},$$

where L_X denotes the Lie derivative in the direction of X .

A convenient description of $K(S^{1|2})$ is obtained by viewing its elements as Hamiltonian vector fields corresponding to functions on $S^{1|2}$. Indeed, define the Hamiltonian vector field X_f associated with a function $f(x, \theta_1, \theta_2)$ by

$$X_f = (-1)^{|f|+1} \left(\frac{\partial f}{\partial \theta_1} \frac{\partial}{\partial \theta_1} + \frac{\partial f}{\partial \theta_2} \frac{\partial}{\partial \theta_2} \right),$$

where $|f|$ denotes the parity of f . The Euler vector field is defined by

²In this section we consider all equations within the spatially periodic setting—although formally the same arguments apply to the case on the line, further technical complications arise due to the need of imposing boundary conditions at infinity, see Ref. 5.

$$E = \theta_1 \frac{\partial}{\partial \theta_1} + \theta_2 \frac{\partial}{\partial \theta_2},$$

and, for each function f on $S^{1|2}$, we let $D(f) = 2f - E(f)$. Then the map

$$f \mapsto K_f := D(f) \frac{\partial}{\partial x} - X_f + \frac{\partial f}{\partial x} E$$

satisfies $[K_f, K_g] = K_{\{f, g\}}$ where

$$\{f, g\} = D(f) \frac{\partial g}{\partial x} - \frac{\partial f}{\partial x} D(g) + (-1)^{|f||g|} \left(\frac{\partial f}{\partial \theta_1} \frac{\partial g}{\partial \theta_1} + \frac{\partial f}{\partial \theta_2} \frac{\partial g}{\partial \theta_2} \right). \tag{2.1}$$

Thus, the map $f \rightarrow K_f$ is a homomorphism from the Lie superalgebra of functions f on $S^{1|2}$ endowed with the bracket (2.1) to $K(S^{1|2})$.

B. Euler equation on $K(S^{1|2})$

For two even functions U and V on $S^{1|2}$ (we usually refer to U and V as “superfields”), we define a Lie bracket $[\cdot, \cdot]$ by

$$[U, V] = UV_x - U_x V + \frac{1}{2} [(D_1 U)(D_1 V) + (D_2 U)(D_2 V)]. \tag{2.2}$$

It is easily verified that $[U, V] = \frac{1}{2} \{U, V\}$, where $\{\cdot, \cdot\}$ is the bracket in (2.1). The Euler equation with respect to a metric $\langle \cdot, \cdot \rangle$ is given by²

$$U_i = B(U, U), \tag{2.3}$$

where the bilinear map $B(U, V)$ is defined by the relation

$$\langle B(U, V), W \rangle = \langle U, [V, W] \rangle$$

for any three even superfields U, V, W . Recall that $A = iD_1 D_2 - \gamma$. Letting

$$\langle U, V \rangle = -i \int dx d\theta_1 d\theta_2 U A V, \tag{2.4}$$

a computation shows that

$$B(U, U) = A^{-1} \left[- (MU)_x + \frac{1}{2} [(D_1 M)(D_1 U) + (D_2 M)(D_2 U)] \right]. \tag{2.5}$$

It follows from (2.3) and (2.5) that (1.5) is the Euler equation corresponding to $\langle \cdot, \cdot \rangle$ given by (2.4).

Remark 2.1: We make the following observations:

- (1) The action of the inverse A^{-1} of the operator $A = iD_1 D_2 - \gamma$ in Eq. (2.5) is well defined. Indeed, the map A can be expressed as

$$A: \begin{pmatrix} u \\ \varphi_1 \\ \varphi_2 \\ v \end{pmatrix} \mapsto \begin{pmatrix} iv - \gamma u \\ i\varphi_{2x} - \gamma\varphi_1 \\ -i\varphi_{1x} - \gamma\varphi_2 \\ -iu_{xx} - \gamma v \end{pmatrix}, \tag{2.6}$$

where we identify a superfield with the column vector made up of its four component fields [e.g., $U = u + \theta_1 \varphi_1 + \theta_2 \varphi_2 + \theta_2 \theta_1 v$ is identified with the column vector $(u, \varphi_1, \varphi_2, v)^T$]. Let $C^\infty(S^1; \mathbb{C})$ denote the space of smooth periodic complex-valued functions. Since the operator $1 - \partial_x^2$ is an isomorphism from $C^\infty(S^1; \mathbb{C})$ to itself, we deduce from (2.6) that the operation of A^{-1} on smooth periodic complex-valued superfields is well defined when $\gamma = 1$. Consider now the case of $\gamma = 0$. In this case, it follows from (2.6) that A^{-1} involves the inverses of the

operators ∂_x^2 and ∂_x . In order to make sense of these inverses we restrict the domain of A to the set

$$\mathcal{E} = \{U = u + \theta_1 \varphi_1 + \theta_2 \varphi_2 + \theta_2 \theta_1 v \text{ is smooth and periodic} \mid u(0) = \varphi_1(0) = \varphi_2(0) = 0\}.$$

The operator $A = iD_1 D_2$ maps this restricted domain \mathcal{E} bijectively onto the set

$$\mathcal{F} = \left\{ M = i(n + \theta_1 \psi_1 + \theta_2 \psi_2 + \theta_2 \theta_1 m) \text{ is smooth and periodic} \mid \int_{S^1} m dx = \int_{S^1} \psi_1 dx = \int_{S^1} \psi_2 dx = 0 \right\}.$$

Hence, the inverse A^{-1} is a well-defined map $\mathcal{F} \rightarrow \mathcal{E}$. Writing $M = i(n + \theta_1 \psi_1 + \theta_2 \psi_2 + \theta_2 \theta_1 m)$, $A^{-1}M$ is given explicitly by

$$A^{-1}M = \begin{pmatrix} - \int_0^x \int_0^y m(z) dz dy + x \int_{S^1} \int_0^y m(z) dz dy \\ - \int_0^x \psi_2(y) dy \\ \int_0^x \psi_1(y) dy \\ n(x) \end{pmatrix}.$$

Note that the expression

$$- (MU)_x + \frac{1}{2} [(D_1 M)(D_1 U) + (D_2 M)(D_2 U)] = - i [(D_1 D_2 U)U + \frac{1}{2} (D_1 U)(D_2 U)]_x$$

acted on by A^{-1} in Eq. (2.5) belongs to \mathcal{F} for any even superfield U . Hence, the operation of A^{-1} in Eq. (2.5) is well defined also when $\gamma=0$. The restriction of the domain of A to \mathcal{E} is related to the fact that the two-component Eq. (1.4) with $\gamma=0$ is invariant under the symmetry

$$u(x, t) \rightarrow u(x - c(t), t) + c'(t), \quad \rho(x, t) \rightarrow \rho(x - c(t), t)$$

for any sufficiently regular function $c(t)$. Hence, by enforcing the condition $u(0)=0$, we remove obvious nonuniqueness of the solutions to the equation.

- (2) If we restrict attention to the bosonic sector and let

$$U = u_1 + \theta_2 \theta_1 v_1, \quad V = u_2 + \theta_2 \theta_1 v_2,$$

the Lie bracket (2.2) induces on two pairs of functions (u_1, v_1) and (u_2, v_2) the bracket

$$[(u_1, v_1), (u_2, v_2)] = (u_1 u_{2x} - u_{1x} u_2, u_1 v_{2x} - u_2 v_{1x}). \tag{2.7}$$

We recognize (2.7) as the commutation relation for the semidirect product Lie algebra $\text{Vect}(S^1) \ltimes C^\infty(S^1)$, where $\text{Vect}(S^1)$ denotes the space of smooth vector fields on S^1 , see Ref. 22.

- (3) The restriction of the metric (2.4) to the bosonic sector induces on pair of functions (u, v) the bilinear form

$$\langle (u_1, v_1), (u_2, v_2) \rangle = \int (i\gamma(u_1v_2 + u_2v_1) + u_{1x}u_{2x} + v_1v_2)dx. \quad (2.8)$$

Changing variables from (u_j, v_j) to (u_j, ρ_j) , $j=1, 2$, according to (1.6), Eq. (2.8) becomes

$$\langle (u_1, \rho_1), (u_2, \rho_2) \rangle = \int (\gamma u_1 u_2 + u_{1x} u_{2x} + \sigma \rho_1 \rho_2) dx. \quad (2.9)$$

Hence, as expected, when $\rho_1 = \rho_2 = 0$ the metric reduces to the H^1 metric (1.1) in the case of CH, while it reduces to the \dot{H}^1 metric (1.2) in the case of HS.

- (4) Our discussion freely used complex-valued expressions and took place only at the Lie algebra level. The extent to which there actually exists a corresponding geodesic flow on the superdiffeomorphism group of the supercircle $S^{1|2}$ has to be further investigated. A first step toward developing such a geometric picture involves dealing with the presence of imaginary numbers in the definition of the metric (2.4) when $\gamma=1$. Although these imaginary factors disappear in the bosonic sector when changing variables to (u, ρ) [see (2.9)], they are still present in the fermionic sector. It seems unavoidable to encounter complex-valued expressions at one point or another of the present construction if one insists on the system being an extension of Eq. (CH) [in Refs. 1 and 35 imaginary factors appear when the coefficients are chosen in such a way that the system is an extension of Eq. (CH)].

III. BI-HAMILTONIAN FORMULATION

Equation (1.5) admits the bi-Hamiltonian structure³

$$M_t = J_1 \frac{\delta H_1}{\delta M} = J_2 \frac{\delta H_2}{\delta M}, \quad (3.1)$$

where the Hamiltonian operators J_1 and J_2 are defined by


$$J_1 = i \left[-\partial_x M - M \partial_x + \frac{1}{2} (D_1 M D_1 + D_2 M D_2) \right], \quad J_2 = -i \partial_x A, \quad (3.2)$$

and the Hamiltonian functionals H_1 and H_2 are defined by

$$H_1 = -\frac{i}{2} \int dx d\theta_1 d\theta_2 M U, \quad H_2 = -\frac{i}{4} \int dx d\theta_1 d\theta_2 \left(M U^2 - \frac{\gamma}{3} U^3 \right). \quad (3.3)$$

³By definition the variational derivative $\delta H / \delta M$ of a functional $H[M]$ is required to satisfy $(d/d\epsilon)H[M + \epsilon \delta M]|_{\epsilon=0} = \int dx d\theta_1 d\theta_2 (\delta H / \delta M) \delta M$ for any smooth variation δM of M .

TABLE I. Recursion scheme for the operators J_1 and J_2 associated with the supersymmetric Eq. (1.5).

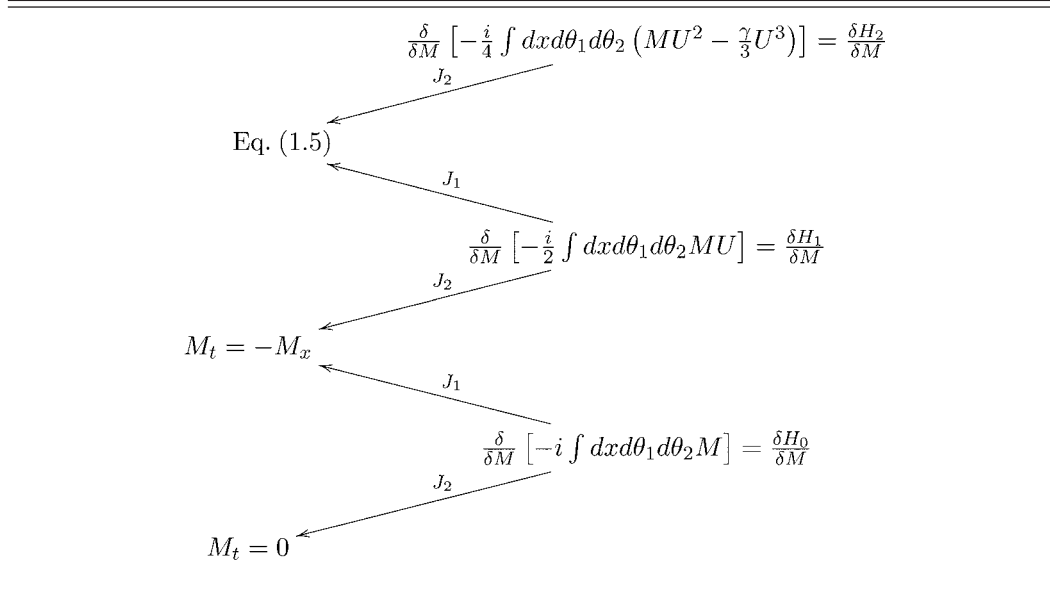

The bi-Hamiltonian formulation (3.1) is a particular case of a construction in Ref. 35 where it was verified that the operators J_1 and J_2 are compatible. The first few conservation laws in the hierarchy generated by J_1 and J_2 are presented in Table I.

Restricting attention to the purely bosonic sector of the bi-Hamiltonian structure of (1.5), we recover bi-Hamiltonian formulations for the two-component generalizations of CH and HS. More precisely, we find that Eq. (1.4) can be put in the bi-Hamiltonian form⁴

$$\begin{pmatrix} m \\ \rho \end{pmatrix}_t = K_1 \text{grad } G_1 = K_2 \text{grad } G_2, \tag{3.4}$$

where the Hamiltonian operators are defined by

$$K_1 = \begin{pmatrix} -m\partial_x - \partial_x m & -\rho\partial \\ -\partial\rho & 0 \end{pmatrix}, \quad K_2 = \begin{pmatrix} -\partial\Lambda & 0 \\ 0 & -\sigma\partial \end{pmatrix}, \tag{3.5}$$

and the Hamiltonians G_1 and G_2 are given by

$$G_1 = \frac{1}{2} \int (um + \sigma\rho^2) dx, \quad G_2 = \frac{1}{2} \int (\sigma u\rho^2 + \gamma u^3 + uu_x^2) dx.$$

For $j=1, 2$, G_j is the restriction to the purely bosonic sector of the functional H_j .

The hierarchy of conserved quantities G_n for the two-component system (1.4) can be obtained from the recursive relations

$$K_1 \text{grad } G_n = K_2 \text{grad } G_{n+1}, \quad n \in \mathbb{Z}.$$

The associated commuting Hamiltonian flows are given by

⁴The gradient of a functional $F[m, \rho]$ is defined by $\text{grad } F = \begin{pmatrix} \delta F / \delta m \\ \delta F / \delta \rho \end{pmatrix}$ provided that there exist functions $\delta F / \delta m$ and $\delta F / \delta \rho$ such that $(d/d\epsilon)F[m + \epsilon\delta m, \rho + \epsilon\delta\rho]|_{\epsilon=0} = \int ((\delta F / \delta m)\delta m + (\delta F / \delta \rho)\delta\rho) dx$, for any smooth variations δm and $\delta\rho$.

$$\begin{pmatrix} m \\ \rho \end{pmatrix}_t = K_1 \text{grad } G_n = K_2 \text{grad } G_{n+1}, \quad n \in \mathbb{Z}.$$

Since K_2^{-1} is a nonlocal operator the expressions for members G_n with $n \geq 3$ are nonlocal when written as functionals of (u, ρ) . On the other hand, since the operator K_1 can be explicitly inverted as

$$K_1^{-1} = \begin{pmatrix} 0 & -\frac{1}{\rho} \partial_x^{-1} \\ -\partial_x^{-1} \frac{1}{\rho} & \partial_x^{-1} \frac{1}{\rho} (m \partial_x + \partial_x m) \frac{1}{\rho} \partial_x^{-1} \end{pmatrix},$$

it is possible to implement on a computer a recursive algorithm for finding the conservation laws G_n for $n \leq 2$. The first few of these conserved quantities and their associated Hamiltonian flows are presented in Table II. Note that G_0 is a Casimir for the positive hierarchy, G_{-2} is a Casimir for the negative hierarchy, and G_{-1} is a Casimir for both the positive and negative hierarchies.

This discussion illustrates that even though many properties of the two-component system (1.4) carry over to its supersymmetric extension (1.5) (such as the property of being a geodesic equation as shown above and the Lax pair formulation as shown below), the construction of a negative hierarchy does not appear to generalize. Certainly, since the conservation laws G_{-1}, G_{-2}, \dots contain negative powers of ρ , these functionals cannot be the restriction to the bosonic sector of functionals H_{-1}, H_{-2}, \dots , which involve only polynomials of the fields U and M and derivatives of these fields.

IV. LAX PAIR

Equation (1.5) is the condition of compatibility of the linear system

$$iD_1 D_2 G = \left(\frac{1}{2\lambda} M + \frac{\gamma}{2} \right) G,$$

$$G_t = \frac{1}{2} U_x G - \frac{1}{2} [(D_1 U)(D_1 G) + (D_2 U)(D_2 G)] - (\lambda + U) G_x, \quad (4.1)$$

where the even superfield G serves as an eigenfunction and $\lambda \in \mathbb{C}$ is a spectral parameter. The Lax pair (4.1) can be derived from the bi-Hamiltonian formulation presented in Sec. III as follows. In view of the general theory of recursion operators,¹⁷ we expect

$$J_1 F = \lambda J_2 F \quad (4.2)$$


to be the x -part of a Lax pair for (1.5). This Lax pair involves the even superfield F , which serves as a “squared eigenfunction,” see Ref. 18. Letting $F = G^2$, a computation shows that Eq. (4.2) holds whenever G satisfies the x -part of (4.1). In order to find the corresponding t -part, we make the ansatz

$$G_t = A_1 G + B_1 D_1 G + B_2 D_2 G + A_2 G_x, \quad (4.3)$$

where A_1, A_2 (B_1, B_2) are even (odd) superfields. Long but straightforward computations show that the compatibility of (4.3) with the x -part of (4.1) is equivalent to the following four equations:

$$M_t = 2\lambda i D_1 D_2 A_1 + (D_1 B_1 + D_2 B_2)(M + \lambda \gamma) + (D_1 A_2 - B_1) D_1 M + (D_2 A_2 - B_2) D_2 M + A_2 M_x, \quad (4.4)$$

TABLE II. Recursion scheme for the two-component generalization (1.4) of the CH (corresponding to $m=u-u_{xx}$) and the HS (corresponding to $m=-u_{xx}$) equations.

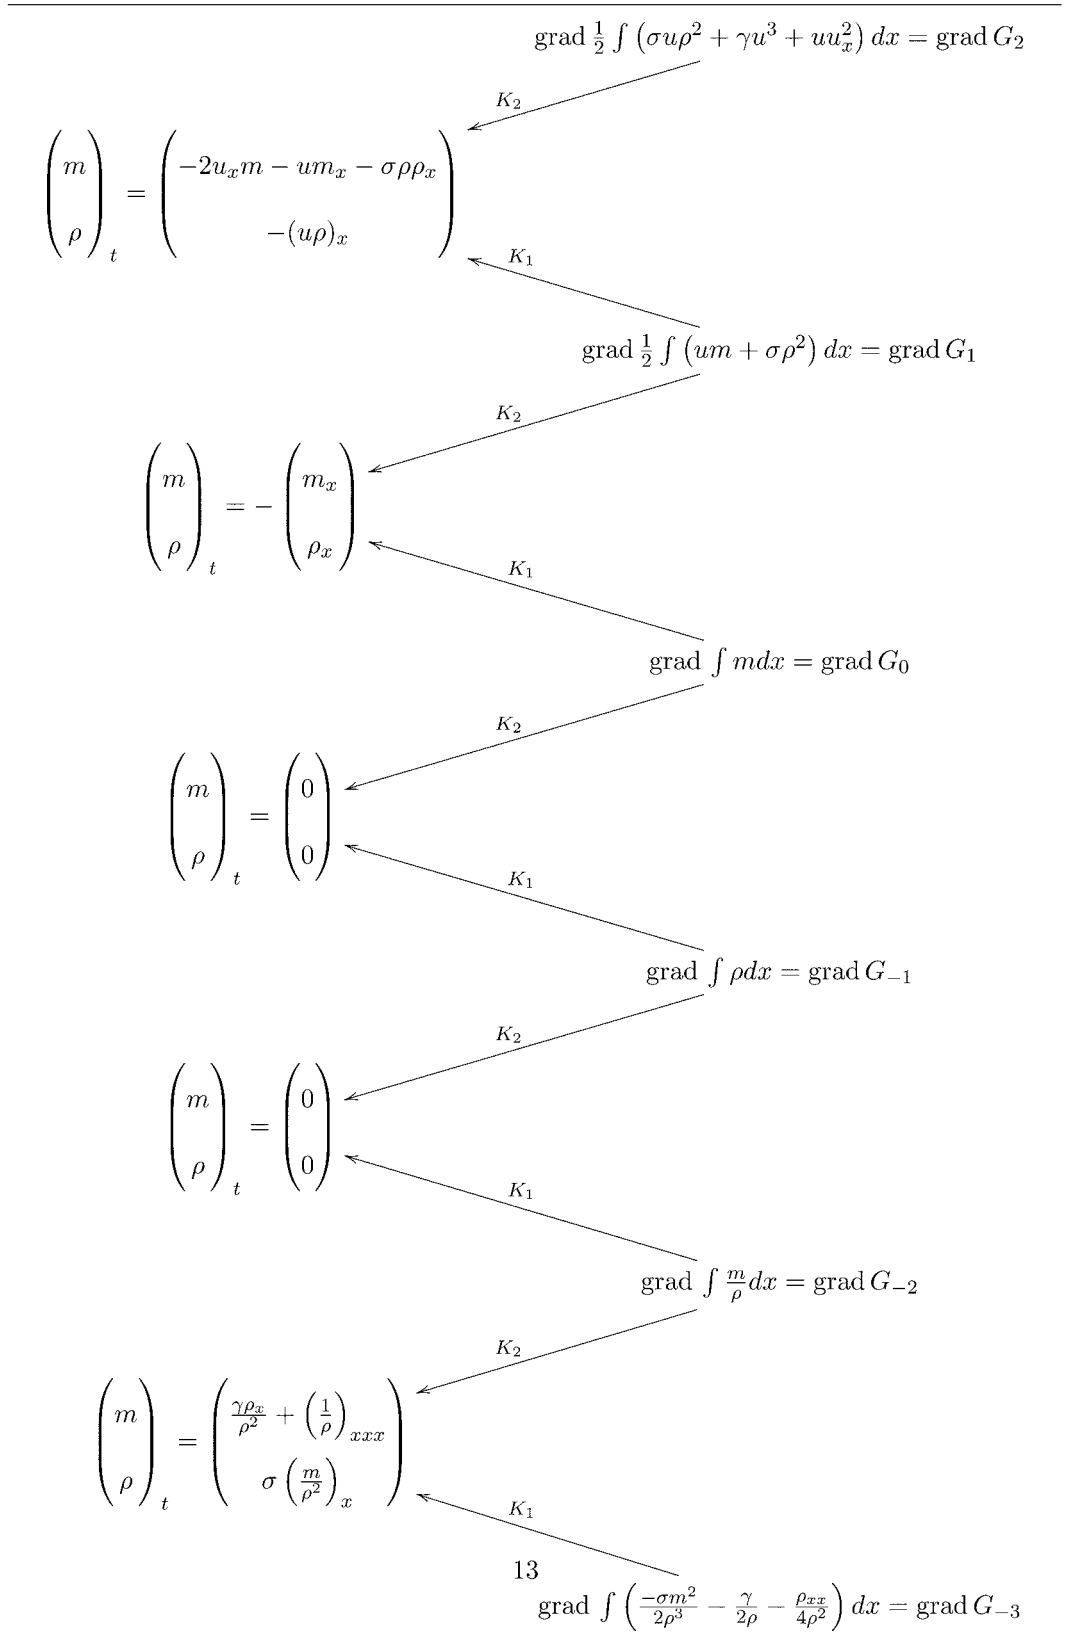

$$\left(\frac{1}{2\lambda}M + \frac{\gamma}{2}\right)B_1 = iD_1D_2B_1 - iD_2A_1 + (D_1A_2 - B_1)\left(\frac{1}{2\lambda}M + \frac{\gamma}{2}\right), \quad (4.5)$$

$$\left(\frac{1}{2\lambda}M + \frac{\gamma}{2}\right)B_2 = iD_1D_2B_2 + iD_1A_1 + (D_2A_2 - B_2)\left(\frac{1}{2\lambda}M + \frac{\gamma}{2}\right), \quad (4.6)$$

$$0 = iD_1D_2A_2 - iD_1B_2 + iD_2B_1. \quad (4.7)$$

Equations (4.4)–(4.7) ascertain the equality of the coefficients of G , D_1G , D_2G , G_x , respectively, on the left- and right-hand sides of the compatibility equation $iD_1D_2(G_t) = (iD_1D_2G)_t$. Letting

$$A_1 = \frac{1}{2}U_x, \quad B_1 = -\frac{1}{2}D_1U, \quad B_2 = -\frac{1}{2}D_2U, \quad A_2 = -(\lambda + U),$$

Equations (4.5)–(4.7) are identically satisfied, while Eq. (4.4) reduces to the supersymmetric system (1.5).

V. EXPLICIT SOLUTIONS: FIRST DECONSTRUCTION

In order to obtain explicit solutions of the supersymmetric system (1.5), we consider the simplest case of fields taking values in the Grassmann algebra consisting of two elements 1 and τ satisfying the following relations:

$$1^2 = 1, \quad \tau \cdot 1 = \tau = 1 \cdot \tau, \quad \tau^2 = 0. \quad (5.1)$$

In the case of this so-called first deconstruction the fields can be written as

$$u = u \cdot 1, \quad \rho = \rho \cdot 1, \quad \varphi_1 = \tau \cdot f_1, \quad \varphi_2 = \tau \cdot f_2,$$

where $f_1(x, t)$ and $f_2(x, t)$ are ordinary real-valued functions. The component equations of (1.5) consist of the bosonic two-component system (1.4) together with the following equations for the fermionic fields:

$$\left. \begin{aligned} (f_1\rho + 2f_{2t} + 2uf_{2x} + f_2u_x)_x + i\gamma(2f_{1t} + 3uf_{1x} + 3f_1u_x) &= 0 \\ (-f_2\rho + 2f_{1t} + 2uf_{1x} + f_1u_x)_x - i\gamma(2f_{2t} + 3uf_{2x} + 3f_2u_x) &= 0 \end{aligned} \right\} \sigma = 1, \quad (5.2)$$

$$\left. \begin{aligned} (-if_1\rho + 2f_{2t} + 2uf_{2x} + f_2u_x)_x + i\gamma(2f_{1t} + 3uf_{1x} + 3f_1u_x) &= 0 \\ (if_2\rho + 2f_{1t} + 2uf_{1x} + f_1u_x)_x - i\gamma(2f_{2t} + 3uf_{2x} + 3f_2u_x) &= 0 \end{aligned} \right\} \sigma = -1. \quad (5.3)$$

We seek traveling-wave solutions for which u and ρ are of the form

$$u = u(y), \quad \rho = \rho(y), \quad y = x - ct, \quad (5.4)$$

where $c \in \mathbb{R}$ denotes the velocity of the wave. Substituting (5.4) into (1.4), we find

$$\begin{aligned} -cm_y + 2u_y m + um_y + \sigma\rho\rho_y &= 0, \quad \sigma = \pm 1, \\ -c\rho_y + (u\rho)_y &= 0. \end{aligned} \quad (5.5)$$

The second of these equations yields for some constant of integration a

$$\rho(y) = \frac{a}{c - u(y)}. \quad (5.6)$$

At this point, it is convenient to restrict attention to the case of either CH or HS. We choose to consider solutions of the HS system.

A. Traveling waves for the supersymmetric HS equation

We first derive solutions for the bosonic fields before considering the extension to the fermionic sector. Since the bosonic sector coincides with Eq. (1.4), this analysis yields as a by-product a classification of the bounded traveling-wave solutions of the two-component HS equation.

1. Bosonic fields

Substituting expression (5.6) for ρ into the first equation of (5.5) and integrating the resulting equation with respect to y , we find

$$cu_{yy} - \frac{1}{2}u_y^2 - uu_{yy} + \frac{\sigma a^2}{2(c-u)^2} = \frac{b}{2}, \quad (5.7)$$

where b is an arbitrary constant of integration. We multiply this equation by $2u_y$ and integrate the resulting equation with respect to y . After simplification, we arrive at the ordinary differential equation (ODE)

$$u_y^2 = \frac{(bu+d)(c-u) - \sigma a^2}{(c-u)^2}, \quad (5.8)$$

where d is yet another integration constant. Introducing z and Z so that

$$(bu+d)(c-u) - \sigma a^2 = b(Z-u)(u-z), \quad (5.9)$$

an analysis of (5.8) reveals that bounded traveling waves arise when z, Z, c, b satisfy⁵

$$b > 0 \quad \text{and} \quad \text{either } z < Z < c \quad \text{or} \quad c < z < Z. \quad (5.10)$$

If (5.10) is fulfilled, then there exists a smooth periodic solution $u(y)$ of Eq. (5.8) such that

$$\min_{y \in \mathbb{R}} u(y) = z, \quad \max_{y \in \mathbb{R}} u(y) = Z.$$

We obtain a traveling wave of the two-component HS equation by constructing $\rho(y)$ from $u(y)$ according to (5.6). It can be checked by considering all possible distributions of the parameters b, z, Z, c that there are no other bounded continuous traveling-wave solutions of the two-component HS equation.⁶

The relations

$$b(z+Z) = bc - d, \quad -bzZ = dc - \sigma a^2,$$

obtained from (5.9), show that

$$b(c-z)(c-Z) = \sigma a^2. \quad (5.11)$$

There are two cases to consider: $a=0$ and $a \neq 0$. If $a=0$, then either $b=0$, $z=c$, or $Z=c$, so that (5.10) does not hold. Hence, no traveling waves exist in this case. If $a \neq 0$, then a^2 is a strictly positive number and relation (5.11) requires that

⁵See Ref. 32 for more details of a similar analysis in the case of equation CH.

⁶If $b > 0$ and $z < c < Z$ there exist periodic solutions $u(y)$ of Eq. (5.8) with cusps, where we say that a continuous function $u(y)$ has a cusp at $y=y_0$ if u is smooth on either side of y_0 but $u_y \rightarrow \pm \infty$ as $y \rightarrow y_0$. However, the existence of a cusp of u at $y=y_0$ implies that $u(y_0)=c$ so that the corresponding function $\rho(y)$ given by Eq. (5.6) is unbounded near y_0 . This argument explains why these solutions are excluded from the list of bounded traveling waves. Similarly, the cusped solutions of Eq. (5.8) which exist when $b < 0$ and either $z < Z < c$ or $c < z < Z$ do not give rise to bounded traveling waves.

$$b(c-z)(c-Z) \geq 0 \quad \text{for } \sigma = \pm 1.$$

The left-hand side of this equation is positive whenever (5.10) holds. This shows that no traveling waves exist when $\sigma = -1$. On the other hand, if $\sigma = 1$ any combination of $b, z, Z, c \in \mathbb{R}$ satisfying (5.10) corresponds to exactly two unique smooth periodic traveling-wave solutions. There are *two* solutions for each admissible combination of b, z, Z, c because these parameters determine a , and hence ρ , only up to sign. In general, Eq. (1.4) is invariant under the symmetry

$$u \rightarrow u, \quad \rho \rightarrow -\rho.$$

Let us mention that equation HS admits no bounded traveling waves. This can be seen from the above analysis because $\rho = 0$ if and only if $a = 0$, and we have seen that no traveling waves exist in this case. Hence, in this regard the two-component generalization with $\sigma = 1$ presents a qualitatively richer structure than its one-component analog.

2. Fermionic fields

We now consider the fermionic fields corresponding to the periodic traveling waves found in the previous subsection. Hence, let $\sigma = 1$ and let (u, ρ) be a smooth periodic traveling-wave solution of the two-component HS equation (1.4). The relevant fermionic equations obtained from (5.2) and (5.6) are

$$\begin{aligned} \frac{af_1}{c-u} + 2f_{2t} + 2uf_{2x} + f_2u_x &= B, \\ \frac{-af_2}{c-u} + 2f_{1t} + 2uf_{1x} + f_1u_x &= C, \end{aligned} \tag{5.12}$$

where B and C are arbitrary constants of integration. One way to obtain explicit (complex-valued) solutions of (5.12) is to seek solutions of the form $B = C = 0$ and $f_1 = if_2 =: f(y)$, where, as above, $y = x - ct$. In this case, the system (5.12) reduces to the single equation

$$\frac{iaf}{c-u} - 2(c-u)f_y + fu_y = 0, \tag{5.13}$$

This equation can be solved explicitly for f . Equations (5.8), (5.9), and (5.13) yield

$$\left(\frac{ia + \operatorname{sgn}((c-u)u_y) \sqrt{b(Z-u)(u-z)}}{c-u} \right) f - 2(c-u)f_y = 0.$$

Using that

$$du = \operatorname{sgn}((c-u)u_y) \frac{\sqrt{b(Z-u)(u-z)}}{c-u} dy,$$

we can write the solution to this equation as

$$\log f = \int_{u_0}^u \frac{ia + \operatorname{sgn}((c-u)u_y) \sqrt{b(Z-u)(u-z)}}{2(c-u)} \frac{du}{\operatorname{sgn}((c-u)u_y) \sqrt{b(Z-u)(u-z)}}. \tag{5.14}$$

We find f by computing the integral in (5.14) and using the relation $a = \operatorname{sgn}(a) \sqrt{b(c-z)(c-Z)}$ to eliminate a . Letting f_0 denote the value of f at a point where $u = z$, we obtain

$$f(y) = f_0 \sqrt{\frac{c-z}{c-u(y)}} \exp \left[\frac{i}{2} \operatorname{sgn}(a(c-u)y) \arctan \left(\frac{2\sqrt{(c-z)(c-Z)(Z-u(y))(u(y)-z)}}{-2zZ + c(z+Z-2u(y)) + (z+Z)u(y)} \right) \right]. \quad (5.15)$$

Note that the identity

$$e^{\pm(i/2)\arctan t} = \left(\frac{1+it}{1-it} \right)^{\pm 1/4}$$

implies that apart from the presence of fractional powers the right-hand side of (5.15) is a rational function of u .

3. Summarized result

We can summarize our discussion as follows. Consider the supersymmetric HS equation for $\sigma=1$ with fields taking values in the Grassmann algebra $\{1, \tau\}$:

$$M_t = -(MU)_x + \frac{1}{2}[(D_1M)(D_1U) + (D_2M)(D_2U)], \quad (5.16)$$

$$U = u + \theta_1 \tau f_1 + \theta_2 \tau f_2 + \theta_2 \theta_1 \rho, \quad M = iD_1 D_2 U.$$

For any $\alpha = \pm 1$, $f_0 \in \mathbb{C}$, and $b, z, Z, c \in \mathbb{R}$ satisfying (5.10), Eq. (5.16) admits the smooth periodic solution

$$u(x, t) = \tilde{u}(y), \quad \text{where } \tilde{u} \text{ solves } \tilde{u}_y^2 = \frac{b(Z-\tilde{u})(\tilde{u}-z)}{(c-\tilde{u})^2}, \quad y = x - ct, \quad (5.17)$$

$$\rho(x, t) = \alpha \frac{\sqrt{b(c-z)(c-Z)}}{|c-u(x, t)|}, \quad (5.18)$$

$$f_1(x, t) = i f_2(x, t) = f_0 \sqrt{\frac{c-z}{c-u}} \exp \left[\alpha \operatorname{sgn}(u_x) \frac{i}{2} \arctan \left(\frac{2\sqrt{(c-z)(c-Z)(Z-u)(u-z)}}{-2zZ + c(z+Z-2u) + (z+Z)u} \right) \right], \quad (5.19)$$

where we have suppressed the (x, t) -dependence of u in the last equation. In particular, restriction to the bosonic sector yields that (u, ρ) given by (5.17) and (5.18) constitute a traveling-wave solution of the two-component HS equation (1.4) with $\sigma=1$, see Fig. 1.

Let us point out that, although we cannot present an explicit formula for $u(x, t)$, integration of the ODE for \tilde{u} shows that u is given implicitly up to a translation in x by

$$x - ct = \pm \frac{(u-z)(Z-u) + \sqrt{(u-z)(Z-u)}(2c-z-Z) \tan^{-1} \left(\sqrt{\frac{u-z}{Z-u}} \right)}{\sqrt{b(u-z)(Z-u)}}.$$

The stability of these traveling-wave solutions is of interest, especially since in the case of the CH equation it is known that the smooth and peaked traveling waves are orbitally stable, see Refs. 12–14 and 31.

VI. EXPLICIT SOLUTIONS: SECOND DECONSTRUCTION

In this section, we extend the analysis of the previous section to the case of the second deconstruction, that is, to the case of fields taking values in the Grassmann algebra $\{1, \tau_1, \tau_2, \tau_1 \tau_2\}$ where τ_1 and τ_2 are odd variables. Under this assumption we may write

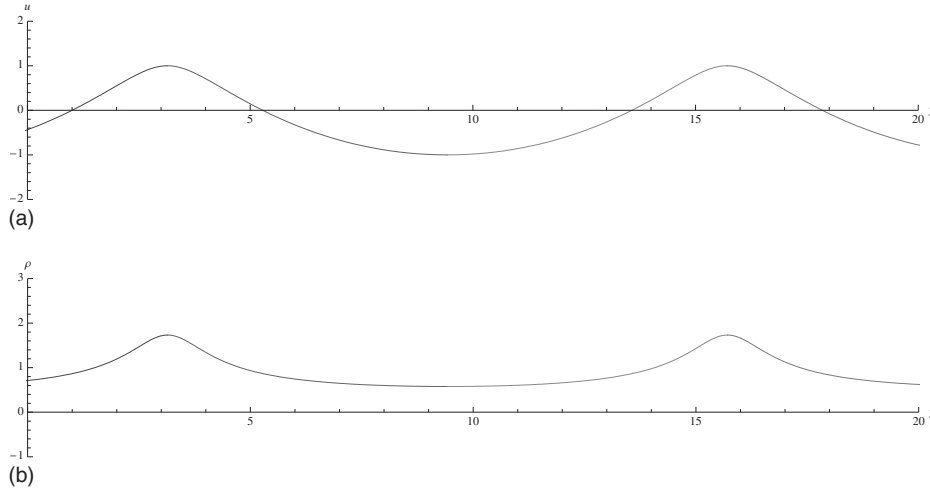


FIG. 1. A traveling-wave solution (u, ρ) of the two-component HS equation (1.4) with $\sigma=1$ and the parameter values $b=1$, $z=-1$, $Z=1$, $c=2$. The top and bottom graphs show u and ρ as functions of $y=x-ct$, respectively.

$$u = u_1 + \tau_2 \tau_1 u_2, \quad \rho = \rho_1 + \tau_2 \tau_1 \rho_2, \quad \varphi_1 = \tau_1 f_1 + \tau_2 g_1, \quad \varphi_2 = \tau_1 f_2 + \tau_2 g_2, \quad (6.1)$$

where $u_1, u_2, \rho_1, \rho_2, f_1, f_2, g_1, g_2$ are real-valued functions of x and t . For simplicity, we henceforth consider only the case of HS with $\sigma=1$. In view of the expressions in (6.1) for $u, \rho, \varphi_1, \varphi_2$, we find that Eq. (1.5) is equivalent to the following list of equations:

$$\rho_{1t} + (\rho_1 u_1)_x = 0, \quad (6.2)$$

$$-\rho_1 \rho_{1x} + 2u_{1x} u_{1xx} + u_{1txx} + u_1 u_{1xxx} = 0, \quad (6.3)$$

$$(f_1 \rho_1 + 2f_{2t} + 2u_1 f_{2x} + f_2 u_{1x})_x = 0, \quad (6.4)$$

$$(g_1 \rho_1 + 2g_{2t} + 2u_1 g_{2x} + g_2 u_{1x})_x = 0, \quad (6.5)$$

$$(-f_2 \rho_1 + 2f_{1t} + 2u_1 f_{1x} + f_1 u_{1x})_x = 0, \quad (6.6)$$

$$(-g_2 \rho_1 + 2g_{1t} + 2u_1 g_{1x} + g_1 u_{1x})_x = 0, \quad (6.7)$$

$$2\rho_{2t} + (f_2 g_1 - f_1 g_2 + 2u_2 \rho_1 + 2u_1 \rho_2)_x = 0, \quad (6.8)$$

$$(2u_{2tx} + g_1 f_{1x} + g_2 f_{2x} - f_1 g_{1x} - f_2 g_{2x} + 2u_{1x} u_{2x} + 2u_2 u_{1xx} + 2u_1 u_{2xx} - 2\rho_1 \rho_2)_x = 0. \quad (6.9)$$

Equations (6.2)–(6.9) ascertain the equality of the coefficients of $1, \theta_1 \theta_2, \theta_1 \tau_1, \theta_1 \tau_2, \theta_2 \tau_1, \theta_2 \tau_2, \tau_1 \tau_2, \theta_1 \theta_2 \tau_1 \tau_2$, respectively, on the left- and right-hand sides of Eq. (1.5). We make the following observations:

- Eqs. (6.2) and (6.3) make up the two-component HS equation (1.4) for $\sigma=1$ with (u, ρ) replaced by (u_1, ρ_1) .
- Eqs. (6.4) and (6.6) are the fermionic equations (5.2) encountered in the case of the first deconstruction with (u, ρ) replaced by (u_1, ρ_1) .
- Eqs. (6.5) and (6.7) are the fermionic equations (5.2) encountered in the case of the first deconstruction with (u, ρ) replaced by (u_1, ρ_1) and (f_1, f_2) replaced by (g_1, g_2) .
- Eqs. (6.8) and (6.9) are the only equations involving u_2 and ρ_2 .

In view of these observations, (u_1, ρ_1, f_1, f_2) and (u_1, ρ_1, g_1, g_2) constitute two sets of solutions to the equations considered in the case of the first deconstruction. We can therefore apply the analysis of Sec. V to obtain explicit expressions for these fields which fulfill Eqs. (6.2)–(6.7); Eqs. (6.8) and (6.9) can then be used to determine u_2 and ρ_2 . Note that for solutions of the form $f := f_1 = if_2$ and $g := g_1 = ig_2$, Eqs. (6.8) and (6.9) reduce to

$$\rho_{2t} + (u_2\rho_1 + u_1\rho_2)_x = 0, \quad (6.10)$$

$$(u_{2tx} + u_{1x}u_{2x} + u_2u_{1xx} + u_1u_{2xx} - \rho_1\rho_2)_x = 0. \quad (6.11)$$

Assuming that (u_1, ρ_1) is a traveling-wave solution of (1.4) of the form constructed in Sec. V, we can obtain solutions $u_2 = u_2(y)$ and $\rho_2 = \rho_2(y)$, $y = x - ct$, of Eqs. (6.10) and (6.11) as follows. In view of (5.6), we have $\rho_1 = a/(c - u_1)$ for some constant a . Hence, Eq. (6.10) yields

$$\rho_2 = \frac{au_2}{(c - u_1)^2} - \frac{E}{c - u_1},$$

where the constant E arose from an integration with respect to y . Substituting this expression for ρ_2 into Eq. (6.11), we find

$$\left[-cu_{2yy} + u_{1y}u_{2y} + u_2u_{1yy} + u_1u_{2yy} - \frac{a^2u_2}{(c - u_1)^3} + \frac{Ea}{(c - u_1)^2} \right]_x = 0.$$

Letting $u_2 = c - u_1$, this equation becomes

$$\left[cu_{1yy} - \frac{1}{2}u_{1y}^2 - u_1u_{1yy} - \frac{a(a - E)}{2(c - u_1)^2} \right]_x = 0.$$

A comparison with (5.7) shows that this equation is fulfilled provided that $E = 2a$. We conclude that (6.10) and (6.11) are satisfied for

$$u_2 = c - u_1, \quad \rho_2 = -\frac{a}{c - u_1}.$$

We note that $\rho_2 = -\rho_1$ for this solution.

A. Summarized result

The discussion in this section can be summarized as follows. Consider the supersymmetric HS equation for $\sigma = 1$ with fields taking values in the Grassmann algebra $\{1, \tau_1, \tau_2, \tau_1\tau_2\}$:

$$M_t = -(MU)_x + \frac{1}{2}[(D_1M)(D_1U) + (D_2M)(D_2U)],$$

$$U = (u_1 + \tau_2\tau_1u_2) + \theta_1(\tau_1f_1 + \tau_2g_1) + \theta_2(\tau_1f_2 + \tau_2g_2) + \theta_2\theta_1(\rho_1 + \tau_2\tau_1\rho_2), \quad (6.12)$$

$$M = iD_1D_2U.$$

For any $\alpha = \pm 1$, $f_0, g_0 \in \mathbb{C}$, and $b, z, Z, c \in \mathbb{R}$ satisfying (5.10), Eq. (6.12) admits the smooth periodic solution

$$u_1(x, t) = \tilde{u}(y), \quad \text{where } \tilde{u} \text{ solves } \tilde{u}_y^2 = \frac{b(Z - \tilde{u})(\tilde{u} - z)}{(c - \tilde{u})^2}, \quad y = x - ct,$$

$$\rho_1(x, t) = \alpha \frac{\sqrt{b(c - z)(c - Z)}}{|c - u_1(x, t)|},$$

$$f_1(x,t) = if_2(x,t) = f_0 \sqrt{\frac{c-z}{c-u_1}} \exp \left[\alpha \operatorname{sgn}(u_{1x}) \frac{i}{2} \arctan \left(\frac{2\sqrt{(c-z)(c-Z)(Z-u_1)(u_1-z)}}{-2zZ + c(z+Z-2u_1) + (z+Z)u_1} \right) \right],$$

$$g_1(x,t) = ig_2(x,t) = g_0 \sqrt{\frac{c-z}{c-u_1}} \exp \left[\alpha \operatorname{sgn}(u_{1x}) \frac{i}{2} \arctan \left(\frac{2\sqrt{(c-z)(c-Z)(Z-u_1)(u_1-z)}}{-2zZ + c(z+Z-2u_1) + (z+Z)u_1} \right) \right],$$

$$u_2(x,t) = c - u_1(x,t),$$

$$\rho_2(x,t) = -\rho_1(x,t).$$

ACKNOWLEDGMENTS

J.L. acknowledges support from a Marie Curie Intra-European Fellowship. The work of O.L. is partially supported by DFG. Grant No. Le-838/9

- ¹ Aratyn, H., Gomes, J. F., and Zimerman, A. H., "Deformations of $N=2$ superconformal algebra and supersymmetric two-component Camassa-Holm equation," *J. Phys. A* **40**, 4511 (2007).
- ² Arnold, V., "Sur la géométrie différentielle des groupes de Lie de dimension infinie et ses application à l'hydrodynamique des fluides parfaits," *Ann. Inst. Fourier* **16**, 319 (1966).
- ³ Camassa, R. and Holm, D. D., "An integrable shallow water equation with peaked solitons," *Phys. Rev. Lett.* **71**, 1661 (1993).
- ⁴ Chen, M., Liu, S.-Q., and Zhang, Y., "A two-component generalization of the Camassa-Holm equation and its solutions," *Lett. Math. Phys.* **75**, 1 (2006).
- ⁵ Constantin, A., "Existence of permanent and breaking waves for a shallow water equation: A geometric approach," *Ann. Inst. Fourier* **50**, 32 (2000).
- ⁶ Constantin, A. and Escher, J., "Global existence and blow-up for a shallow water equation," *Ann. Sc. Norm. Super. Pisa, Sci. Fis. Mat.* **26**, 303 (1998).
- ⁷ Constantin, A., Kappeler, T., Kolev, B., and Topalov, P., "On geodesic exponential maps of the Virasoro group," *Ann. Global Anal. Geom.* **31**, 155 (2007).
- ⁸ Constantin, A. and Kolev, B., "Geodesic flow on the diffeomorphism group of the circle," *Comment. Math. Helv.* **78**, 787 (2003).
- ⁹ Constantin, A. and Kolev, B., "Integrability of invariant metrics on the diffeomorphism group of the circle," *J. Nonlinear Sci.* **16**, 109 (2006).
- ¹⁰ Constantin, A. and Lannes, D., "The hydrodynamical relevance of the Camassa-Holm and Degasperis-Procesi equations," *Arch. Ration. Mech. Anal.* (in press).
- ¹¹ Constantin, A. and McKean, H. P., "A shallow water equation on the circle," *Commun. Pure Appl. Math.* **52**, 949 (1999).
- ¹² Constantin, A. and Molinet, L., "Orbital stability of solitary waves for a shallow water equation," *Physica D* **157**, 75 (2001).
- ¹³ Constantin, A. and Strauss, W., "Stability of peakons," *Commun. Pure Appl. Math.* **53**, 603 (2000).
- ¹⁴ Constantin, A. and Strauss, W., "Stability of the Camassa-Holm solitons," *J. Nonlinear Sci.* **12**, 415 (2002).
- ¹⁵ Deligne, P. and Morgan, J., in *Quantum Fields and Strings: A Course for Mathematicians*, edited by P. Deligne, P. Etingof, D. S. Freed, L. Jeffrey, D. Kazhdan, J. Morgan, D. R. Morrison, and E. Witten (American Mathematical Society, Providence, 1999), Vol. I, p. 41Ð99, AMS-IAS.
- ¹⁶ Escher, J., Lechtenfeld, O., and Yin, Z., "Well-posedness and blow-up phenomena for the 2-component Camassa-Holm equation," *Discrete Contin. Dyn. Syst.* **19**, 493 (2007).
- ¹⁷ Fokas, A. S., "Symmetries and integrability," *Stud. Appl. Math.* **77**, 253 (1987).
- ¹⁸ Fokas, A. S. and Anderson, R. L., "On the use of isospectral eigenvalue problems for obtaining hereditary symmetries for Hamiltonian systems," *J. Math. Phys.* **23**, 1066 (1982).
- ¹⁹ Fokas, A. S. and Liu, Q. M., "Asymptotic integrability of water waves," *Phys. Rev. Lett.* **77**, 2347 (1996).
- ²⁰ Fuchssteiner, B. and Fokas, A. S., "Symplectic structures, their Bäcklund transformation and hereditary symmetries," *Physica D* **4**, 47 (1981).
- ²¹ Gesztesy, F. and Holden, H., "Algebro-geometric solutions of the Camassa-Holm hierarchy," *Rev. Mat. Iberoam.* **19**, 73 (2003).
- ²² Guha, P. and Olver, P. J., "Geodesic flow and two (super) component analog of the Camassa-Holm equation," *Symmetry, Integr. Geom.: Methods Appl.* **2**, 054 (2006).
- ²³ Guieu, L. and Roger, C., *L'algèbre et le Groupe de Virasoro* (Les Publications du CRM, Montreal, QC, 2007).
- ²⁴ Hunter, J. K. and Saxton, R., "Dynamics of director fields," *SIAM J. Appl. Math.* **51**, 1498 (1991).
- ²⁵ Hunter, J. K. and Zheng, Y., "On a completely integrable nonlinear hyperbolic variational equation," *Physica D* **79**, 361 (1994).
- ²⁶ Ivanov, R., "Extended Camassa-Holm hierarchy and conserved quantities," *Z. Naturforsch., A: Phys. Sci.* **61**, 133 (2006).
- ²⁷ Johnson, R., "Camassa-Holm, Korteweg-de Vries and related models for water waves," *J. Fluid Mech.* **455**, 63 (2002).

- ²⁸Khesin, B. and Misiołek, G., “Euler equations on homogeneous spaces and Virasoro orbits,” *Adv. Math.* **176**, 116 (2003).
- ²⁹Kolev, B., “Poisson brackets in hydrodynamics,” *Discrete Contin. Dyn. Syst.* **19**, 555 (2007).
- ³⁰Kolev, B., “Bi-Hamiltonian systems on the dual of the Lie algebra of vector fields of the circle and periodic shallow water equations,” *Philos. Trans. R. Soc. London, Ser. A* **365**, 2333 (2007).
- ³¹Lenells, J., “Stability of periodic peakons,” *Int. Math. Res. Notices* **2004**, 485.
- ³²Lenells, J., “Traveling wave solutions of the Camassa-Holm equation,” *J. Differ. Equations* **217**, 393 (2005).
- ³³Marsden, J. E. and Ratiu, T. S., *Introduction to Mechanics and Symmetry*, Texts in Applied Mathematics Vol. 17, 2nd ed. (Springer-Verlag, Berlin, 1999).
- ³⁴Misiołek, G., “A shallow water equation as a geodesic flow on the Bott-Virasoro group,” *J. Geom. Phys.* **24**, 203 (1998).
- ³⁵Popowicz, Z., “A 2-component or $N=2$ supersymmetric Camassa-Holm equation,” *Phys. Lett. A* **354**, 110 (2006).